



## THININSTALL™ SERIES WALL MOUNT SOLUTIONS



Thininstall™ Swing Arm Mounts are engineered to deliver ultra low-profile installations with state-of-the-art functionality for all types of displays. Installer-inspired features make installation safe and easy. Customize your installation with a full line of supporting accessories.

### **ARE YOU A CHIEF CERTIFIED PARTNER?**

Register at [chiefmfg.com/certification](http://chiefmfg.com/certification)


[chiefmfg.com](http://chiefmfg.com)

# DON'T JUST INSTALL, THINSTALL™

Chief's Thinstall Series Swing Arm Mounts are ultra low-profile full-motion wall mounts for LED, LCD and plasma TVs and displays. These sleek, ruggedly-constructed solutions have low 1.5 to 1.8" (38 to 46 mm) profiles, are easy to install and extend up to 25" (635 mm).

## FEATURES

- 1 FULL EXTENSION**  
Arms extend out up to 25" (635 mm) for maximum viewing potential.
- 2 ULTRA LOW-PROFILE**  
These sleek designs collapse 1.5 to 1.8" (38 to 46 mm) providing an ultra-thin profile.
- 3 CONTROLZONE™ HEIGHT ADJUSTMENT**  
Adjust the height of your entire configuration post-installation up to 1" (25 mm).
- 4 CENTERLESS™ LATERAL SHIFT**  
Get up to 16" (406 mm) of post-installation shift for limitless centering possibilities.
- 5 CENTRIS™ LOW-PROFILE FINGERTIP TILT**  
Provides up to 15° of fingertip tilt to achieve the perfect viewing angle.
- 6 INTEGRATED CABLE MANAGEMENT**  
Enclosed, tool-less cable covers and a wide open wall plate make it easy to route power and signal cables.



**TS525TU**

for 37 - 58" displays

**TS325TU**

for 26 - 52" displays

**TS318TU**

for 26 - 52" displays

**TS218SU**

for 26 - 47" displays

**TS118SU**

for 10 - 32" displays

**TS110SU**

for 10 - 32" displays

**SWING ARM SPECIFICATIONS**

Model	TV Size Range	Depth	Extension	Centerless Lateral Shift	Centris Low-Profile Tilt	Max Mounting Pattern (WxH)	Weight Capacity
TS525TU	37 - 58"	1.5" (38 mm)	25" (635 mm)	16" (406 mm)	-15°	800 x 400 mm	125 lbs (56.7 kg)
TS325TU	26 - 52"	1.8" (46 mm)	25" (635 mm)	16" (406 mm)	-15°	600 x 400 mm	75 lbs (34 kg)
TS318TU	26 - 52"	1.8" (46 mm)	18" (457 mm)	16" (406 mm)	-15°	600 x 400 mm	75 lbs (34 kg)
TS318SU	26 - 52"	1.8" (46 mm)	18" (457 mm)	0" (single stud)	-15°	600 x 400 mm	75 lbs (34 kg)
TS218SU	26 - 47"	1.5" (38 mm)	18" (457 mm)	0" (single stud)	-12°	400 x 400 mm	75 lbs (34 kg)
TS118SU	10 - 32"	1.5" (38 mm)	18" (457 mm)	0" (single stud)	-12°	200 x 200 mm	35 lbs (15.9 kg)
TS110SU	10 - 32"	1.5" (38 mm)	10" (254 mm)	0" (single stud)	-12°	200 x 200 mm	35 lbs (15.9 kg)



## THININSTALL ACCESSORIES

### TA100/TA110 Component Shelf

- TA100 compatible with TS500 and TS300 series, TA110 compatible with TS200 and TS100 series
- Height adjustable shelf sits above or below TV to accommodate different component and screen sizes
- Adds 0.13" (3 mm) of depth to installation



### TA500 In-Wall Accessory Box

- Allows a TS525TU or TS325TU to be recessed into a standard depth wall for a zero-profile installation
- Allows height and lateral adjustment of screen
- Requires a 34.25 x 22" (870 x 559 mm) opening in a standard depth wall



### TA200/TA250 Camera Shelves

- 8" or 12" (203 mm or 305 mm) wide shelf
- Compatible with TS500 and TS300 series swing arms
- Height adjustable shelf sits above or below TV to accommodate different camera and screen sizes
- Adds 0.13" (3 mm) of depth to installation



### TA501 In-Wall Accessory Box

- Allows a TS318U to be recessed into a standard wall for a zero-profile installation
- Allows height and lateral adjustment of screen
- Installs on a standard 16" on center stud wall (requires 1 stud to be cut and reinforced)
- Requires a 30.25 x 24" (768 x 610 mm) opening in a standard depth wall



### TA300 Left/Right Speaker Adapter

- Compatible with TS500 and TS300 series swing arms
- Infinitely adjustable to fit speakers flush with sides of TV
- Adds 0.13" (3 mm) of depth to installation




### TA502 In-Wall Accessory Box

- Allows a TS218SU or TS118SU to be recessed into a standard wall for a zero-profile installation. Installs in between standard 16" on center studs
- Requires a 14.5 x 14.5" (368 x 368 mm) opening in a standard depth wall
- For TVs with mounting patterns larger than 200 x 200 mm, depth from wall will be 0.38" (9 mm)



### TA350 Center Channel Speaker Adapter


- Compatible with TS500 and TS300 series swing arms
- Infinitely adjustable to fit speaker flush with top or bottom of TV
- Adds 0.13" (3 mm) of depth to installation



### TA410 Portrait Adapter


- Compatible with TS500 and TS300 series swing arms
- Allows displays to be installed in portrait orientation
- Not necessary for TVs having VESA 200 x 200 or 100 x 100 mounting patterns
- Adds 0.13" (3 mm) of depth to installation



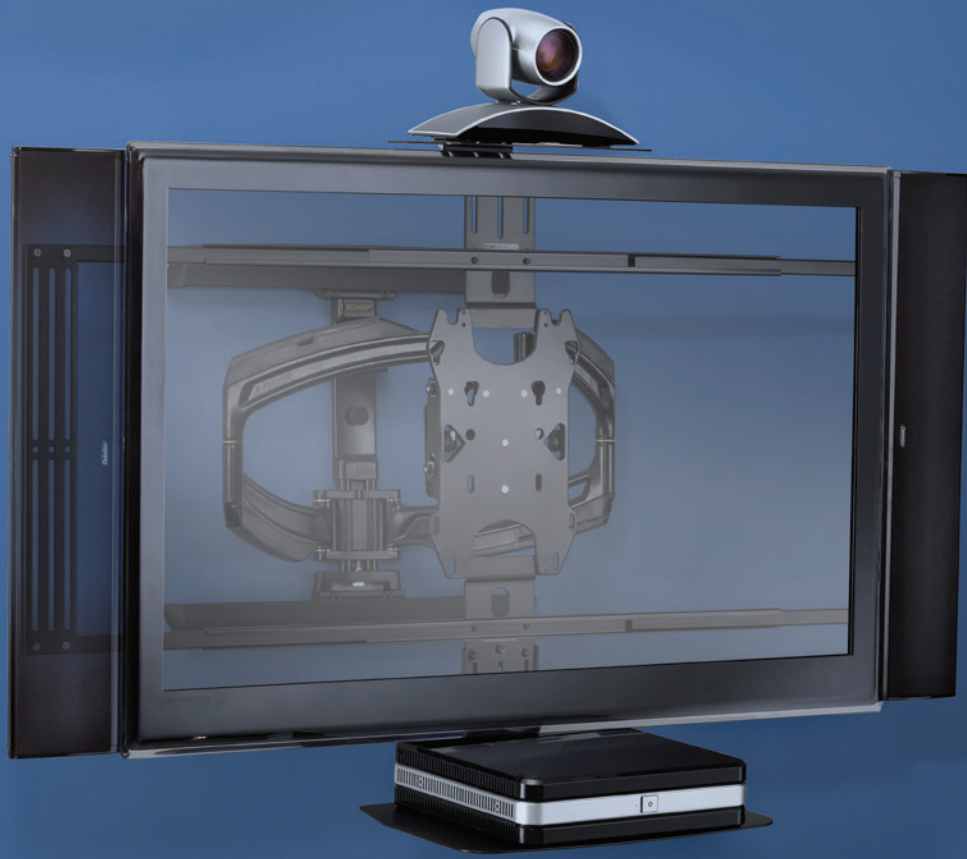

VIDEO CONFERENCING

HOME THEATER

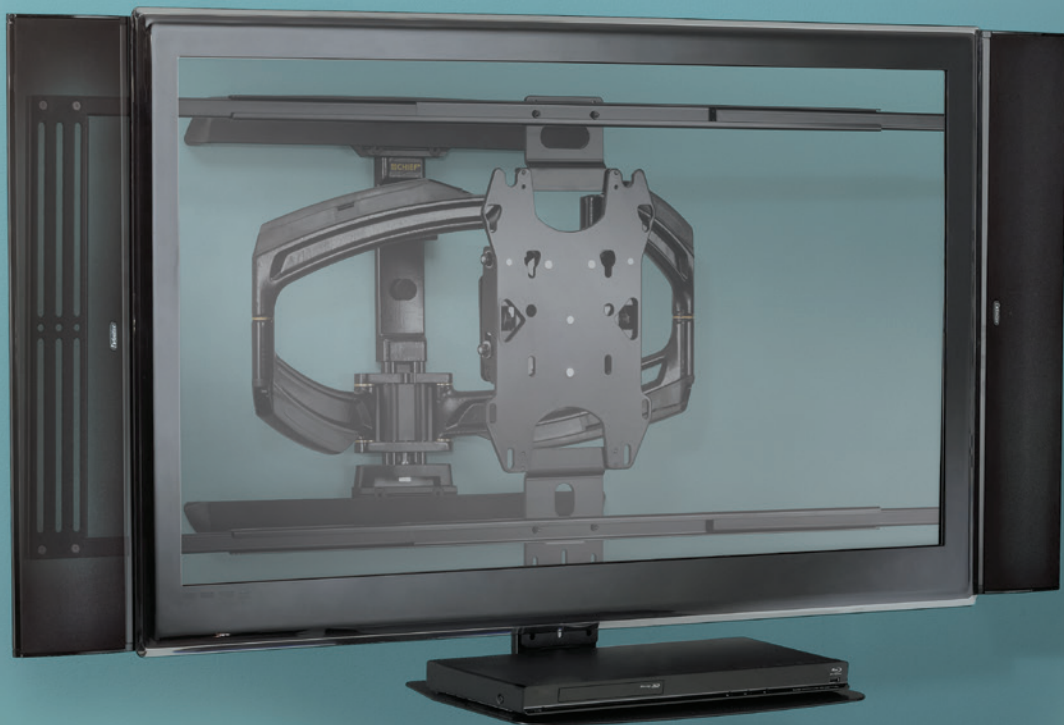

## THININSTALL™ FIXED & TILT MOUNT FEATURES

**GLIDE LOCK™ LATCHING SYSTEM**  
Tool-less latching for faster installation

**EASY CABLE ACCESS**  
Unique kickstand allows easy cable access when needed

**HOOK & LOOP STRAPS**  
Retract the cable kickstand by simply pulling the straps

**IN-WALL BOX**  
Optional storage box for a clean installation




## IN-WALL STORAGE ACCESSORIES

Chief's in-wall storage boxes provide an organized, recessed space for routing excess cables, attaching surge protectors/power conditioners and maximizing the ultra-low profile of Thinstall mounts.

### FEATURES

- Multiple depth break away edge allows compatibility with standard 3.5" studs & 2.5" studs
- Drywall and stud mountable in landscape or portrait orientation
- Knockouts for single gang outlets and 1¼", 1", & ½" conduit
- Integrated universal zip tie anchor points
- Paintable flange and cover options to blend in any environment
- Cover includes optional tamper proof security
- Black & white color options

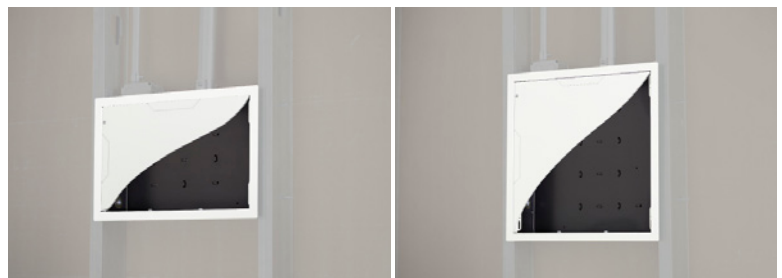

**In-Wall Storage Box  
9" (229 mm)**  
PAC525

**In-Wall Storage Box  
14.25" (362 mm)**  
PAC526



**LTTU Tilt Mount**  
for 37 - 63" displays

**MTTU Tilt Mount**  
for 26 - 47" displays

**LSTU Fixed Mount**  
for 37 - 63" displays

**MSTU Fixed Mount**  
for 26 - 47" displays

## FIXED & TILT MOUNT SPECIFICATIONS

Model	TV Size Range	Depth	Mounting Pattern (WxH)	Max Screen Thickness	Tilt	Weight Capacity
LTTU*	37 - 63"	0.75" (19 mm)	200 x 200 mm to 800 x 500 mm	2.0" (51 mm)	12°	100 lbs (45.4 kg)
MTTU*	26 - 47"	0.75" (19 mm)	100 x 100 mm to 600 x 400 mm	2.0" (51 mm)	12°	100 lbs (45.4 kg)
LSTU	37 - 63"	0.39" (10 mm)	200 x 200 mm to 800 x 500 mm	5.0" (127 mm)	--	125 lbs (56.7 kg)
MSTU	26 - 47"	0.39" (10 mm)	100 x 100 mm to 600 x 400 mm	5.0" (127 mm)	--	125 lbs (56.7 kg)

\*Can only be used with TVs or displays 2" (50.8 mm) deep or less.

## HOME THEATER APPLICATION



## DIGITAL SIGNAGE APPLICATION







A BRAND OF MILESTONE AV TECHNOLOGIES ■ [www.chiefmfg.com](http://www.chiefmfg.com)

USA P 800.582.6480 / +1.952.225.6000 ■ F 877.894.6918 / +1.952.894.6918 ■ [chief@chiefmfg.com](mailto:chief@chiefmfg.com)  
Canada P 877.345.4329 ■ F 888.377.5314 ■ [canadainfo@milestone.com](mailto:canadainfo@milestone.com)  
EMEA P +31 495 580 840 ■ F +31 495 580 845 ■ [emea.sales@milestone.com](mailto:emea.sales@milestone.com)  
Asia Pacific P +852 2145 4099 ■ F +852 2145 4477 ■ [asia.chief@milestone.com](mailto:asia.chief@milestone.com)

In British Columbia, Milestone AV Technologies ULC carries on business as MAVT Milestone AV Technologies ULC.

©2015 Milestone AV Technologies. 120018E 4/15 Chief is a registered trademark of Milestone AV Technologies. All other brand names or marks are used for identification purposes and are trademarks of their respective owners. All patents are protected under existing designations. Other patents pending.